

5002F Series

FEATURES

- > Self priming
- > Dry running
- > Oil-less, non lubricated
- > Suitable for continuous operation
- > Chemical resistant pump materials for aggressive media

TYPICAL APPLICATIONS

- > Chemical Industry
- > Medical Devices
- > Laboratory and Analysis
- > Industrial Applications
- > Hygiene

Consult factory for customized solutions

BASE MODEL


5002F
5002F Twin



Diaphragm

Diaphragm Liquid Pump 5002F

Flow	400 ml/min
Pressure height	up to 40 m H₂O
Suction height	6 m H₂O

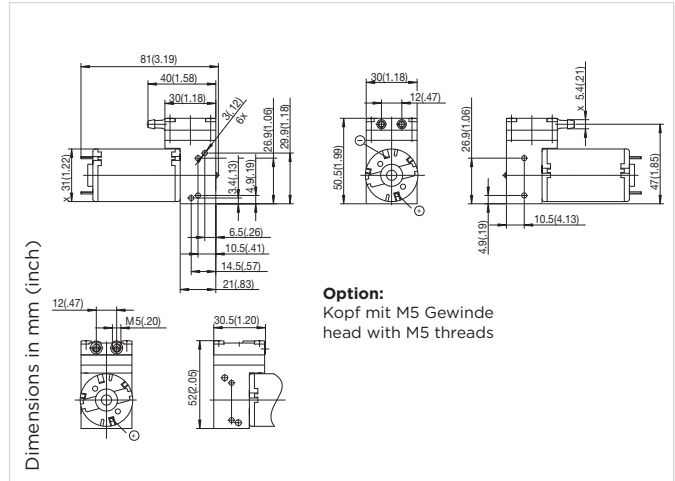

HYDRAULIC DATA

Description	PA/EPDM	PPS/FPM	Carbon/PTFE
Part number	12 V DC 24 V DC 53001002 53001003	53001005 53001006	53001008 53001009
Max. flow	400 ml/min	400 ml/min	400 ml/min
Max. intermittent pressure height	40 m H ₂ O	40 m H ₂ O	40 m H ₂ O
Max. continuous pressure height	up to 15 m H ₂ O	up to 15 m H ₂ O	up to 10 m H ₂ O
Max. suction height	6 m H ₂ O	6 m H ₂ O	5 m H ₂ O

ELECTRICAL DATA

Motor type	Permanent magnet	Permanent magnet	Permanent magnet
Nominal speed	3000 rpm	3000 rpm	3000 rpm
Nominal voltage	12/24 V DC	12/24 V DC	12/24 V DC
Max. power consumption @ 10 m H ₂ O	5 W	7 W	7 W
Motor insulation class	A	A	A
Protection class	IP20	IP20	IP20
EMC protection	Basic EMC filter (2L)	Basic EMC filter (2L)	Basic EMC filter (2L)

GENERAL DATA


Ambient temperature	0 to 40 °C	15 to 40 °C	15 to 40 °C
Media temperature	0 to 70 °C	15 to 70 °C	15 to 70 °C
Weight	0,19 kg	0,19 kg	0,19 kg

WETTED PARTS

Pump head	PA	PPS	Carbon
Diaphragm	EPDM	FPM	PTFE
Valves	EPDM	FPM	FFPM

The technical data is based on the use of PVC measuring tubing, 4 x 1,5 mm (ID x wall thickness), 1 m length, 65° shore hardness. The use of a different tubing will change the flow.

FLOW CURVES

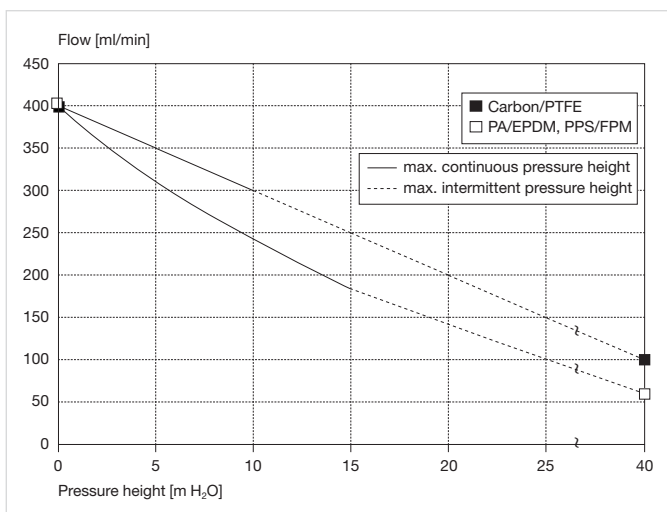


OPTIONS

- > Pump head with M5 female thread (PA, PPS)
- > Pulsation damper

5300... Stock programme

Diaphragm Liquid Pump 5002F Twin DC

Flow	1100 ml/min
Pressure height	up to 25 m H₂O
Suction height	4,5 m H₂O

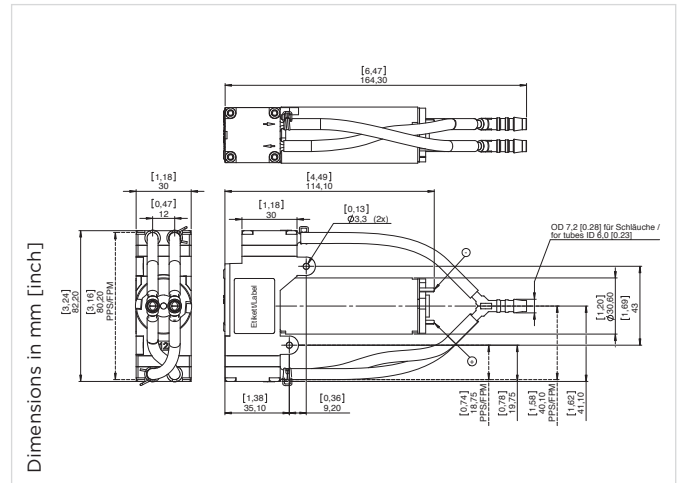

HYDRAULIC DATA

Description	5002F Twin DC Carbon/EPDM		5002F Twin DC PPS/FPM
Part number	12 V	53200001	53200051
	24 V	53200002	53200052
Max. flow (parallel config.)	1000 ml/min		1100 ml/min
Max. intermittent pressure height	25 m H ₂ O		25 m H ₂ O
Max. continuous pressure height	10 m H ₂ O		10 m H ₂ O
Max. suction height	4,5 m H ₂ O		4,5 m H ₂ O

ELECTRICAL DATA

Motor type	Permanent Magnet	Permanent Magnet
Nominal speed	2700 rpm	2500 rpm
Nominal voltage	12/24 V DC	12/24 V DC
Max. power consumption @ 10 m H ₂ O	6,5 W	8,2 W
Motor insulation class	E	E
Protection class	IPO0	IPO0
EMC protection	Yes	Yes

GENERAL DATA


Ambient temperature	0 to 40 °C	0 to 40 °C
Media temperature	0 to 70 °C	0 to 70 °C
Weight	0,34 kg	0,33 kg

WETTED PARTS

Pump head	Carbon	PPS
Diaphragm	EPDM	FPM
Valves	EPDM	FPM
Tubing	PUR	PUR

The technical data is based on the use of PVC measuring tubing, 6 x 2 mm (ID x wall thickness), 1 m length, 75° shore hardness. The use of a different tubing will change the flow.


FLOW CURVES

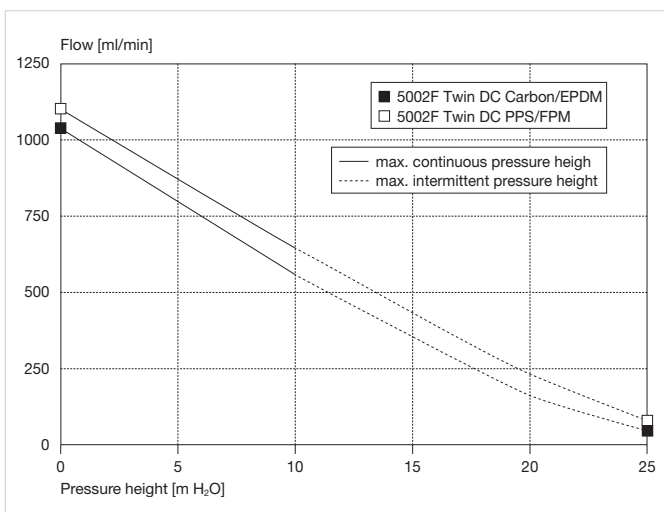

5320... Stock programme

Diaphragm Liquid Pump 5002F Twin LC

Flow	1100 ml/min
Pressure height	up to 25 m H₂O
Suction height	4,5 m H₂O

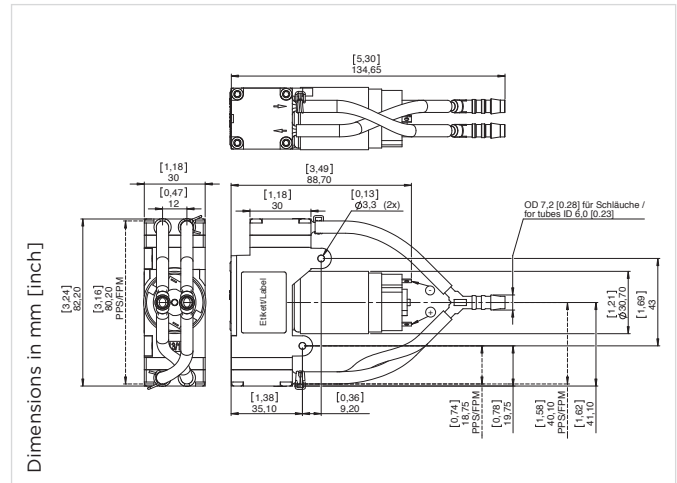

HYDRAULIC DATA

Description	5002F Twin LC Carbon/EPDM	5002F Twin LC PPS/FPM
Part number	12 V 24 V 53200003 53200004	53200053 53200054
Max. flow (parallel config.)	1000 ml/min	1100 ml/min
Max. intermittent pressure height	25 m H ₂ O	25 m H ₂ O
Max. continuous pressure height	10 m H ₂ O	10 m H ₂ O
Max. suction height	4,5 m H ₂ O	4,5 m H ₂ O

ELECTRICAL DATA

Motor type	Permanent Magnet	Permanent Magnet
Nominal speed	2600 rpm	2200 rpm
Nominal voltage	12/24 V DC	12/24 V DC
Max. power consumption @ 10 m H ₂ O	7,2 W	10,0 W
Motor insulation class	F	F
Protection class	IPO0	IPO0
EMC protection	Yes	Yes

GENERAL DATA


Ambient temperature	0 to 40 °C	0 to 40 °C ¹⁾
Media temperature	0 to 70 °C	0 to 70 °C
Weight	0,24 kg	0,23 kg

WETTED PARTS

Pump head	Carbon	PPS
Diaphragm	EPDM	FPM
Valves	EPDM	FPM
Tubing	PUR	PUR

The technical data is based on the use of PVC measuring tubing, 6 x 2 mm (ID x wall thickness), 1 m length, 75° shore hardness. The use of a different tubing will change the flow. ¹⁾Motor housing temperature must not exceed 65°C


FLOW CURVES

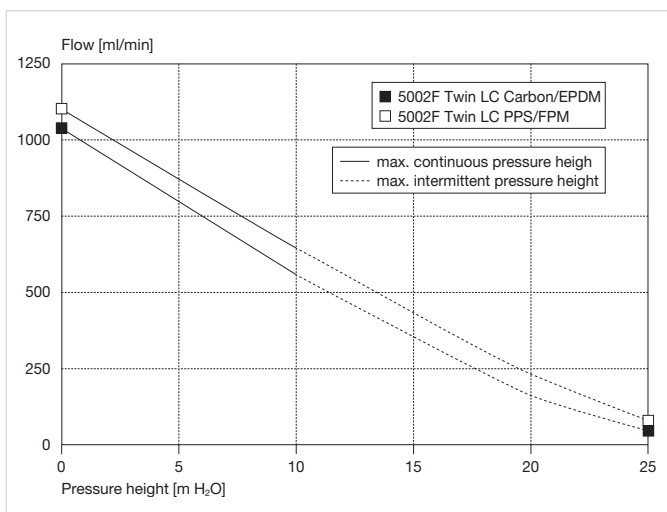

5320... Stock programme

Diaphragm Liquid Pump 5002F Twin BLDC

Flow	1100 ml/min
Pressure height	up to 25 m H ₂ O
Suction height	4,5 m H ₂ O

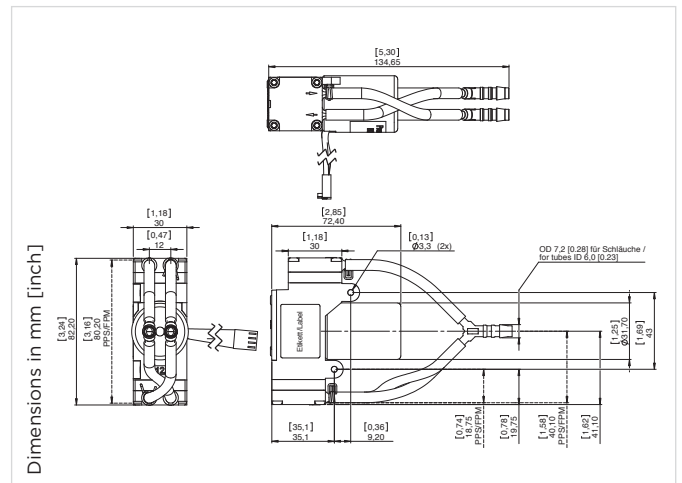

HYDRAULIC DATA

Description	5002F Twin BLDC Carbon/EPDM	5002F Twin BLDC PPS/FPM
Part number	12 V DC 24 V DC 53200005 53200006	53200055 53200056
Max. flow (parallel config.)	1100 ml/min @ 3 V DC control voltage	1100 ml/min @ 3 V DC control voltage
Max. intermittent pressure height	25 m H ₂ O	25 m H ₂ O
Max. continuous pressure height	10 m H ₂ O	10 m H ₂ O
Max. suction height	4,5 m H ₂ O	4,5 m H ₂ O

ELECTRICAL DATA

Motor type	Brushless DC	Brushless DC
Nominal speed	2600 rpm @ 3 V DC speed voltage	2500 rpm @ 3 V DC speed voltage
Nominal voltage	12/24 V DC	12/24 V DC
Max. power consumption @ 10 m H ₂ O	6,3 W	8,1 W
Motor insulation class	B	B
Protection class	IP20	IP20
EMC protection	Yes	Yes
Connector	Housing Terminal	Molex KK 22-01-2045 Molex KK 08-50-0031

GENERAL DATA


Ambient temperature	0 to 40 °C	0 to 40 °C
Media temperature	0 to 70 °C	0 to 70 °C
Weight	0,22 kg	0,21 kg

WETTED PARTS

Pump head	Carbon	PPS
Diaphragm	EPDM	FPM
Valves	EPDM	FPM
Tubing	PUR	PUR

The technical data is based on the use of PVC measuring tubing, 6 x 2 mm (ID x wall thickness), 1 m length, 75° shore hardness. The use of a different tubing will change the flow.

FLOW CURVES

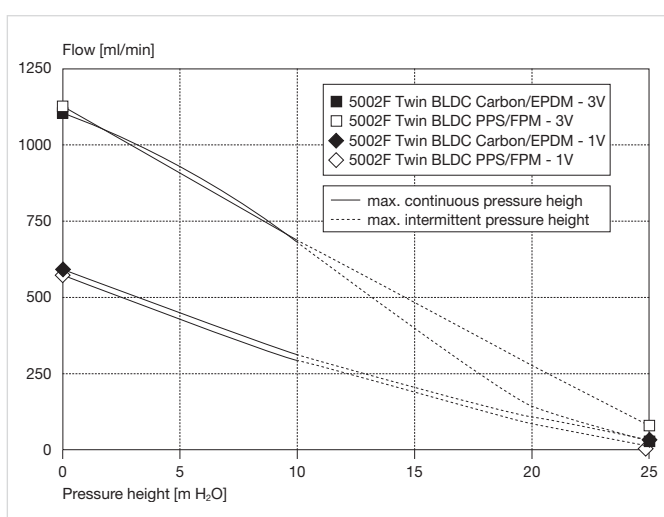

OPTIONS

5320... Stock programme

- > Adapter for 2-wire duty incl. potentiometer for speed adjustment
- > 29011930 (12 V DC), 29011931 (24 V DC)

Function	Colour	Control
Pin 1	V Supply	Red 12 V DC (max. voltage range: 10..18 V DC) 24 V DC (max. voltage range: 14..28 V DC)
Pin 2	Ground	Black Ground for V Supply (Pin 1) and Speed control (Pin 3)
Pin 3	Speed Control	White analog: 0..5 V DC (max. 28V) PWM: 6..20 kHz - 14..96% Speed voltage input threshold: 0.2 V
Pin 4	Tacho out	Green 18 pulses per revolution Pulse time "LOW": 195 µs Output level "LOW": 0 / max. 0.5 V Output level "HIGH": min. 4 V / max. 5 V

Chemical Resistance Chart of Wetted Parts

	Thermoplastics					Thermosets		Elastomers	
	PP	PARA	PPS	PTFE	PVDF	PUR	Carbon	EPDM	FPM
Mineral lubricants (e.g. motor oil)	+	+	+	+	+	+	+	-	+
Aliphatic hydrocarbons (e.g. propane, butane)	+	+	+	+	+	+	+	-	+
Aromatic hydrocarbons (e.g. benzene, carbon monoxide)	O	+	O	+	+	-	+	-	O
Fuel	+	+	+	+	+	+	+	-	+
Minor inorganic acids (e.g. carbon dioxide, hydrochloric acid, perchloric acid)	+	+	+	+	+	-	+	+	+
Strong inorganic acids (e.g. carbon dioxide, hydrochloric acid, perchloric acid)	+	-	O	+	+	-	+	+	+
Minor organic acids (e.g. phenol, monochloroacetic acid, citric acid)	+	-	+	+	+	-	+	O	+
Strong organic acids (e.g. phosphoric acid, chloric acid, citric acid)	+	-	+	+	+	-	+	O	+
Oxidizing acids (e.g. nitric acid, chloric acid, sulfuric acid)	O	-	-	+	O	+	+	+	+
Minor alkalis (e.g. caustic soda, ammonia)	+	+	+	+	+	+	+	+	+
Strong alkalis (e.g. caustic soda, ammonia)	+	+	O	+	-	+	+	+	-
Trichlorethylene	O	-	+	+	+	-	+	-	+
Tetrachlorethylene	O	-	+	+	+	-	+	-	+
Acetone	+	+	+	+	-	-	+	+	-
Alcohols (e.g. methanol)	+	+	+	+	+	O	+	+	-
Hot water (hydrolysis resistance)	+	+	+	+	+	O	+	+	+

+ = small or no effect
 - = minor or moderate effect
 O = severe effect

The chemical resistance is influenced by temperature and concentration of the medium.
 The data has to be seen as an indication and does not guarantee the material properties.



PUMP AND COMPRESSOR SOLUTIONS FOR OEMS WORLDWIDE

gd-thomas.com



Gardner Denver Thomas GmbH
 Livry-Gargan-Str. 10
 82256 Fürstfeldbruck
 Germany
 T +49 8141 2280 0
 F +49 8141 8892136
thomas.de@gardnerdenver.com

Gardner Denver Hong Kong, Limited
 Unit 1317-1318 Delta House, 3 On Yiu Street
 Siu Lek Yuen, Shatin, New Territories
 Hong Kong
 T +852 26903502
 F +852 27924598
thomas.hk@gardnerdenver.com

Gardner Denver Thomas, Inc.
 1419 Illinois Avenue
 Sheboygan, WI 53081
 USA
 T +1 920 4574891
 F +1 920 4514276
td.usa@gardnerdenver.com

The information presented in this material is based on technical data and test results of nominal units. It is believed to be accurate and reliable and is offered as an aid to help in the selection of Thomas products. It is the responsibility of the user to determine the suitability of the product for the intended use and the user assumes all risk and liability in connection there with. Thomas does not warrant, guarantee or assume any obligation or liability in connection with this information.

Models presented in this catalog are representative of the product family. Photos of products pictured in this catalog do not necessarily represent a specific model number. To obtain further information for custom options, contact your local Thomas office.

Printed in Germany Form No. 17000182 04/2015 © Gardner Denver Thomas GmbH. All rights reserved.